

1 to 3 Channels FM (FSK) SAW transmitters with HCS 300 Encoder

HCS-FM-TX3

0.5mW

battery
3V Lithium
Long Life

3V

Information subject to change without notice


Description

Small dimension, hand-held FM transmitter with HCS 300 rolling code encoder. Ideal for remote control applications requiring high security level. High performances from 3V lithium battery. Null consumption in stand-by. **In compliance with EN 300 200, EN 301 489 & EN 60950.**

Descrizione

Trasmittitore FM palmare di ridotte dimensioni dotati di encoder a codice dinamico HCS300. Ideale per applicazioni dove sia richiesto un elevato grado di sicurezza. Elevate prestazioni grazie all'impiego di batterie al litio 3V. Consumo nullo in stand-by. **Conforme alle Normative Europee EN 300 220, EN 301 489 ed EN 60950.**

Mechanical Dimensions

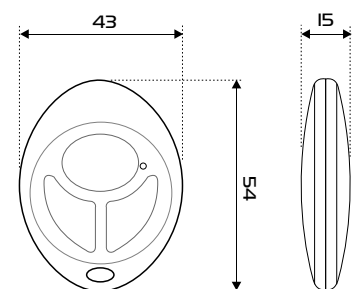

Technical Specification

Ta = 25 °C

CHARACTERISTICS		MIN	TYP	MAX	UNIT
V _s	Lithium battery supply • Alimentazione con batteria al Litio		3		Vdc
I _s	Supply Current • Corrente assorbita		10		mA
F _c	FM carrier frequency • Frequenza portante FM		433.92		MHz±20KHz
P _o	Effective radiated power • Potenza irradiata			0.5	mW
	HCS 300 encoder • Encoder HCS 300		63		bit
T _b	Lithium battery life • Durata batteria	3		5	years
T _{op}	Operating temperature range • Temperatura di lavoro	+10		+55	°C

Product Code:

650200611 (HCS-FM-TX1)
650200612 (HCS-FM-TX2)
650200613 (HCS-FM-TX3)